



CONVERGE: CarbON Valorisation in Energy-efficient Green fuels

Green methanol synthesis for biodiesel production

16-17th February, Converge Workshop

Objectives: Membrane assisted methanol synthesis

This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No. 818135





Membrane assisted methanol synthesis.

- Develop stable membranes at reaction conditions
- Develop multi-tube membrane reactor, targeted conversion for feed CO_2/H_2 33% per pass
- Demonstration of integrated process at TRL 5

Partners involved:

- TNO
- NIC

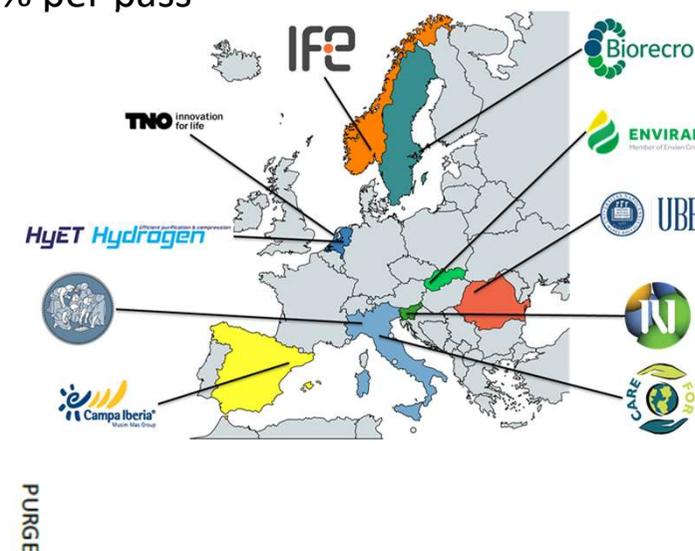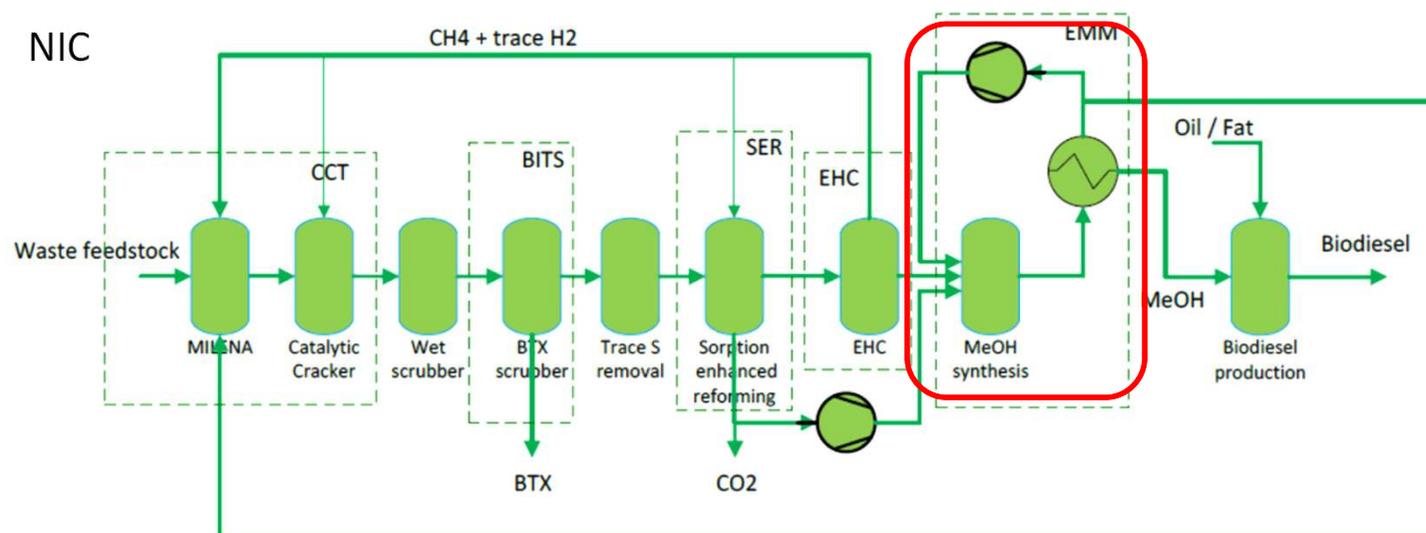




Membrane development - target

This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No. 818135



Membrane development targets:

- 1) Stability at the methanol operating T and p (175-275°C), up to 100bar
- 2) High selectivity for steam and methanol
- 3) High steam/methanol permeability → high flux

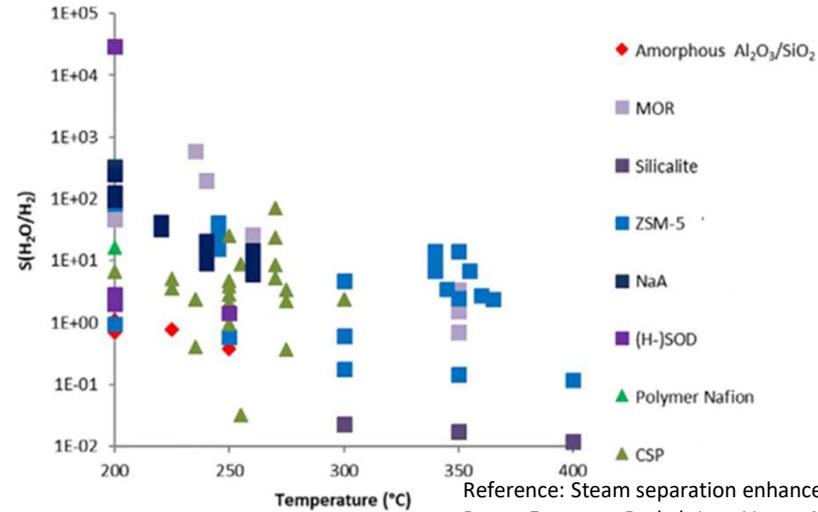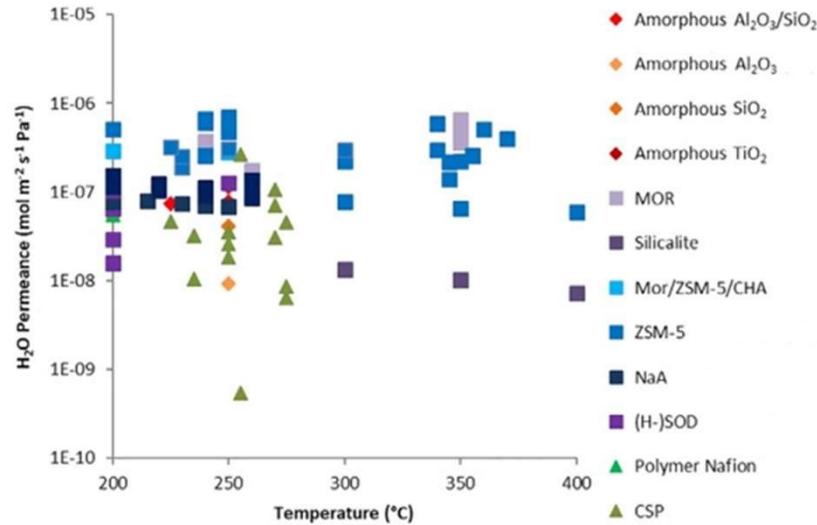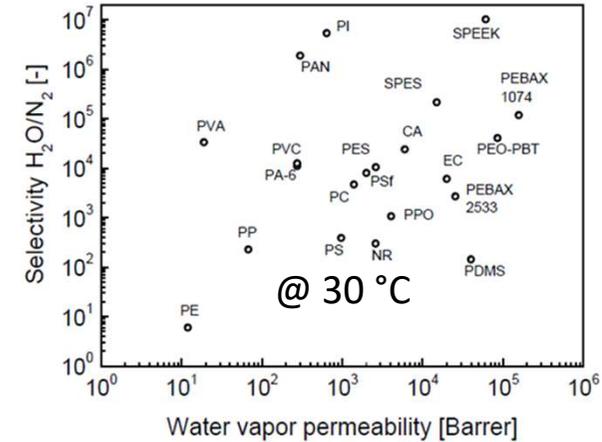


Reference: Steam separation enhanced reactions: Review and outlook, Jasper van Kampen, Jurriaan Boon, Frans van Berkel, Jaap Vente, Martin van Sint Annaland, Chemical Engineering Journal 374, 21019, 1286-1303





- Amorphous microporous
 - APTES-PA (Aminopropyl triethoxysilane-Polyamide)
 - BETSE (1, 2-bis (triethoxysilyl) ethane)
- Polymeric
 - SPEEK (sulfonated poly(ether ether ketone))
 - PI (Poly Imides)
 - PBI (Polybenzimidazol)
 - PDMS (Polydimethylsiloxane)
 - Li-Nafion

Membrane synthesis procedure -support



This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No. 818135

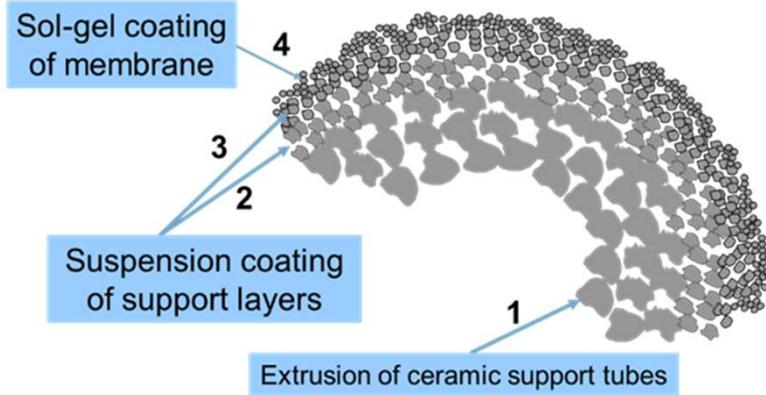


Membrane support layers

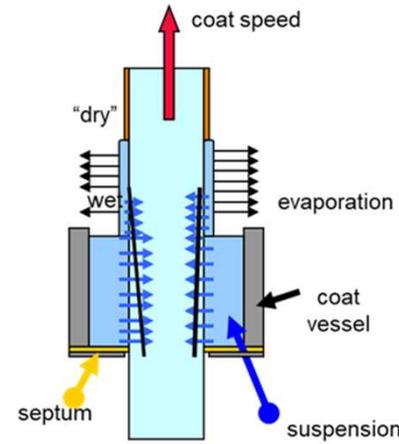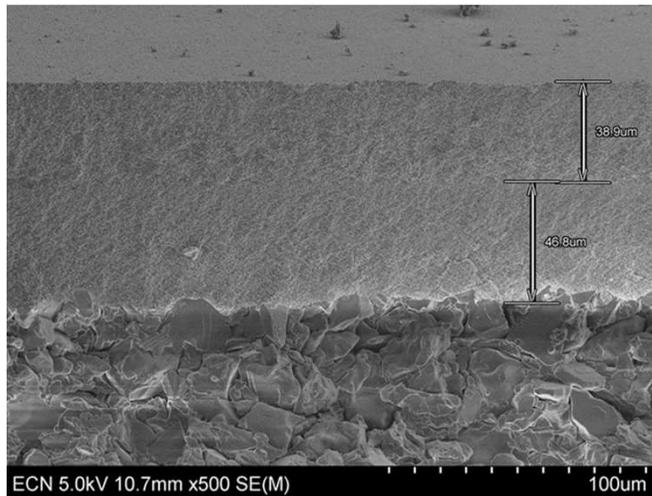

Coating process

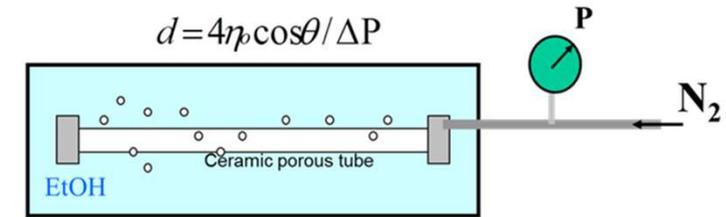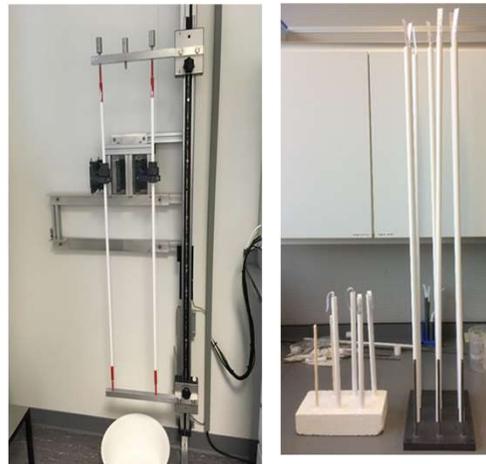


Bubble point test

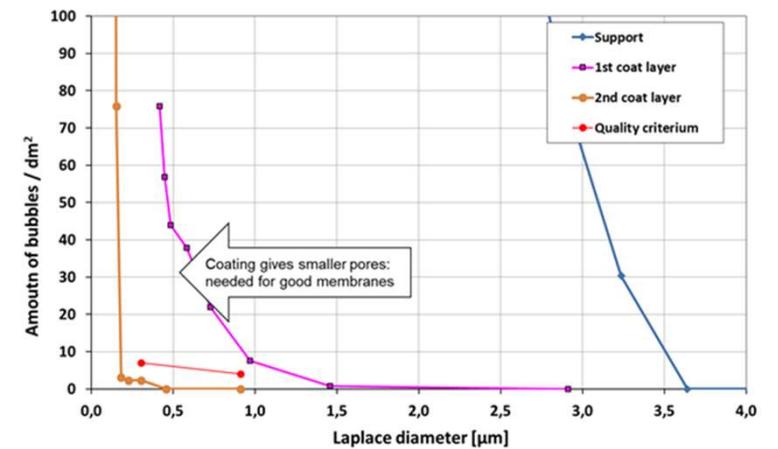

Results membrane separation tests

This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No. 818135

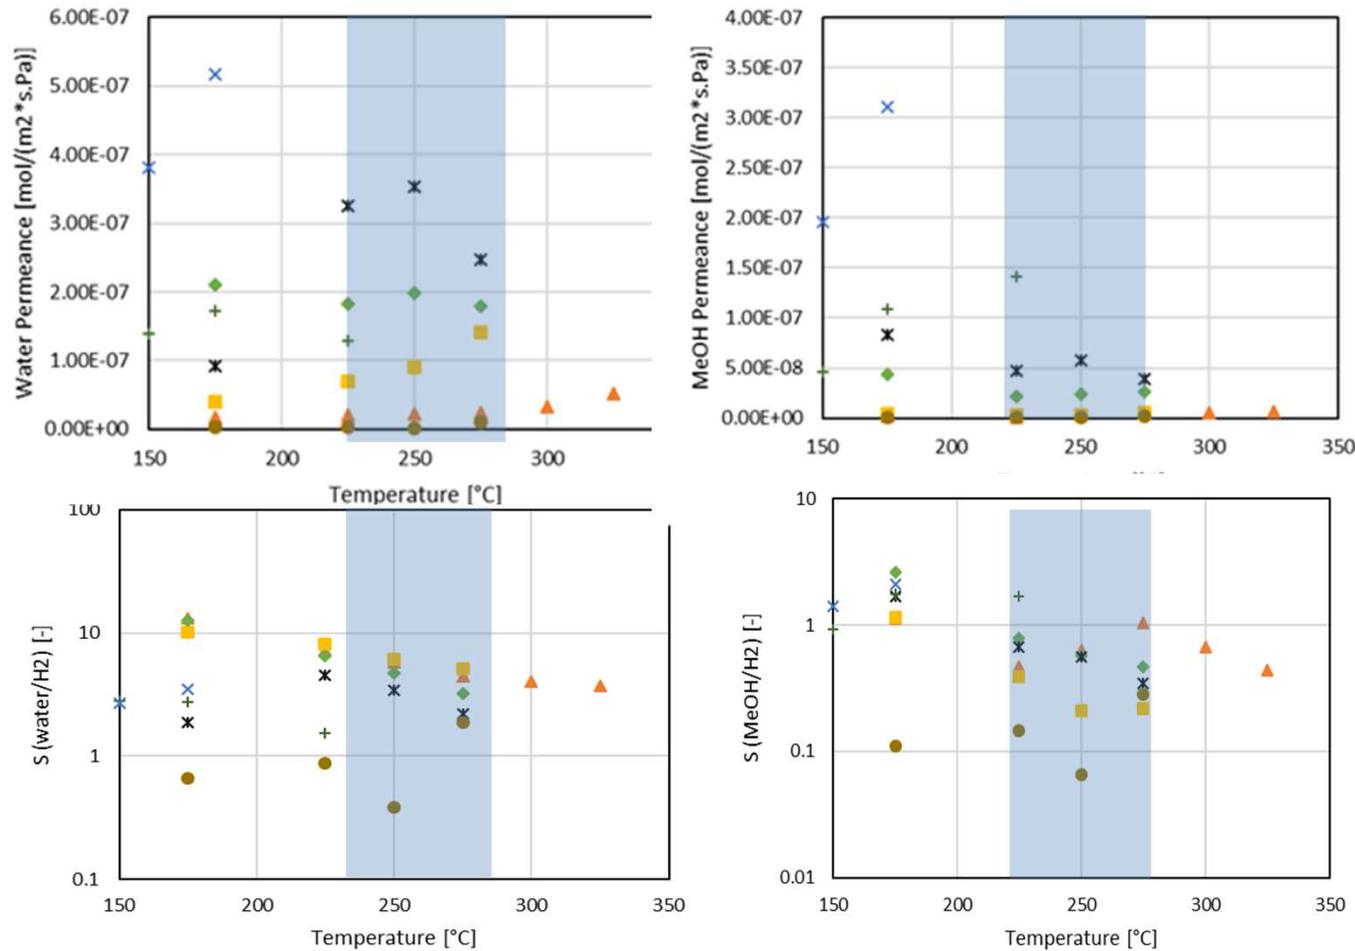

Test conditions:

- $p_{\text{feed}} = 35 \text{ bar}$, $p_{\text{perm}} = 1.5 \text{ bar}$, no sweep
- 60% H₂, 10% (50/50)methanol/steam, 20% CO₂, 1% CO, 9% N₂

Nafion, BETSE, PI highest steam and MeOH permeance

- BETSE performance decreases at 275°C, Nafion not selective at T>225°
- H₂O/H₂ selectivity highest for APTES-PA, SPEEK and PI
- MeOH/H₂ selectivity highest for PDMS 1.7, PI and BETSE ~ 0.6-0.8

Pre-selection:

- 1) PI
- 2) BETSE
- 3) APTES-PA

PDMS, Nafion → no selectivity > 225 °C
 SPEEK → low H₂O and MeOH permeance (10X lower than PI)

PBI → low permeance, low selectivity

Conclusions

This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No. 818135





- PI membrane preselected as the most promising to reach conversion targets. Membrane performance comparison steam/MEOH/mix ($T_{\text{range}} = 225\text{-}250\text{ }^{\circ}\text{C}$)

	PI	BETSE	APTES
• H ₂ O/H ₂ selectivity:	4.7-6.5	3.5-4.3	6-8
• MEOH/H ₂ selectivity:	0.6-0.8	0.6-0.7	0.2-0.4
• H ₂ O permeance:	PI	1.6·PI	PI/2.3
• MeOH permeance:	PI	2.2·PI	PI/8.4

H₂O>H₂>MEOH>CO₂>CO≈N₂

- Steam/H₂ behaviour compares well to literature

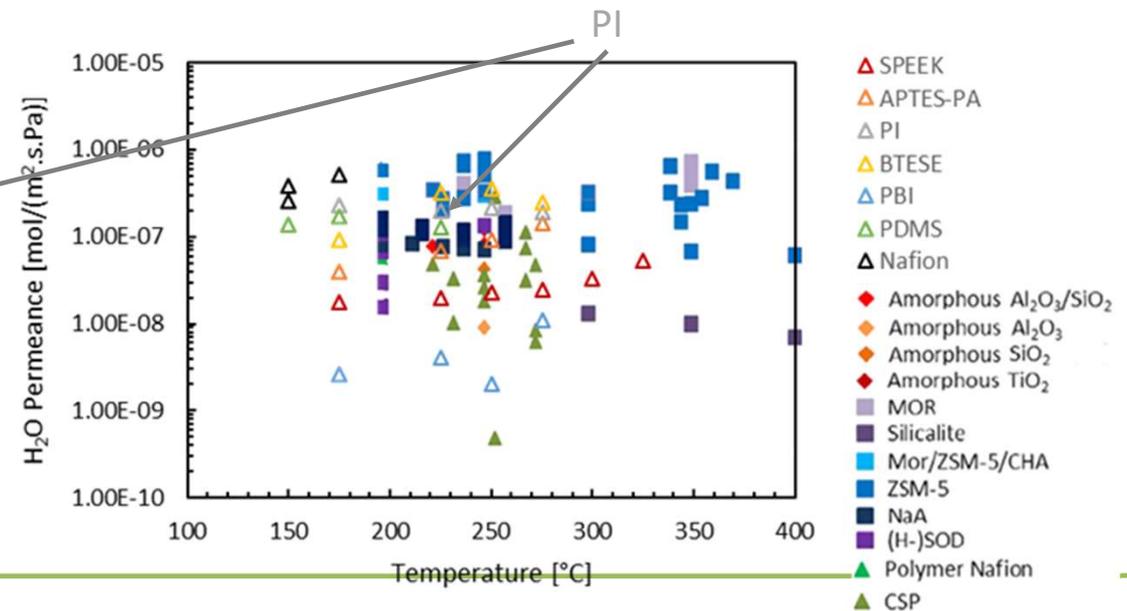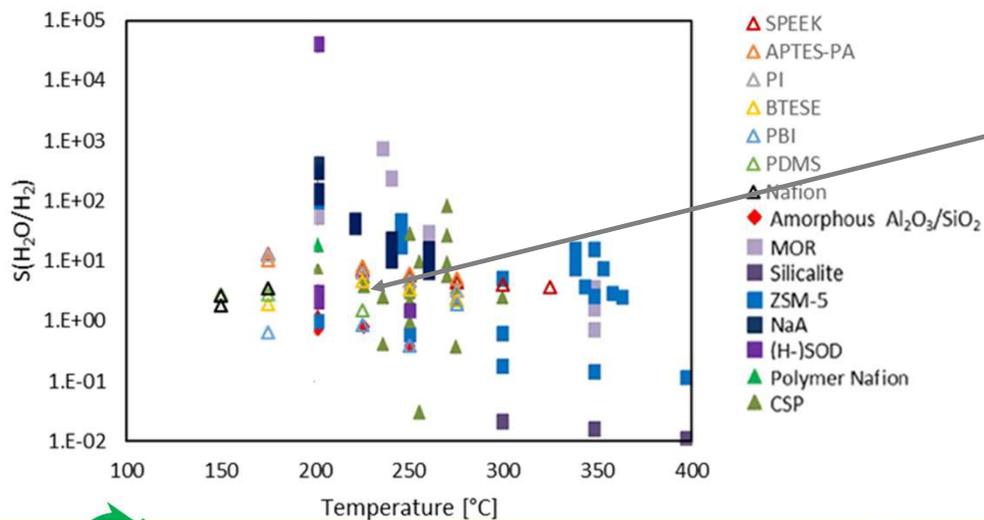

CarbON Valorisation in Energy-efficient Green fuels





Next steps

This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No. 818135



- Testing of preselected membranes in one tube membrane reactor
- Construction and testing of multi-tubular membrane reactor

Feed flow = $45 \text{ Nm}^3/\text{min}$

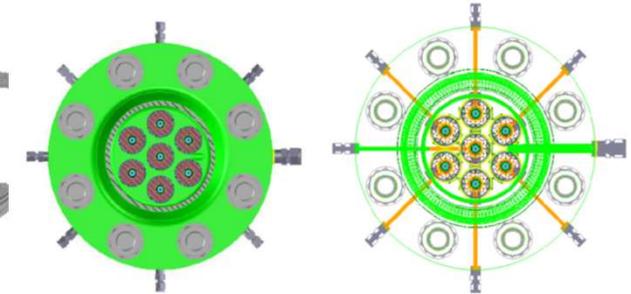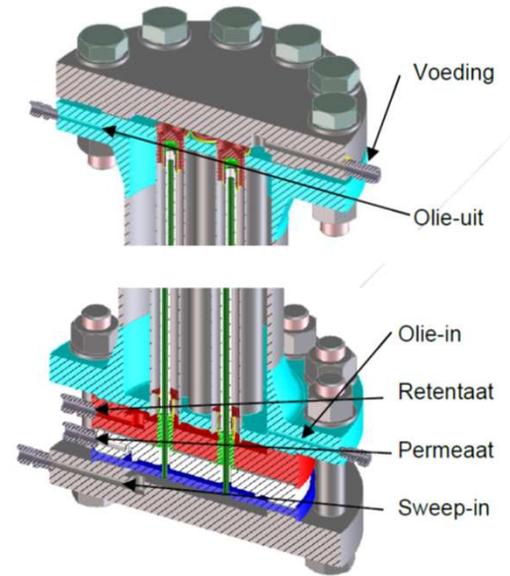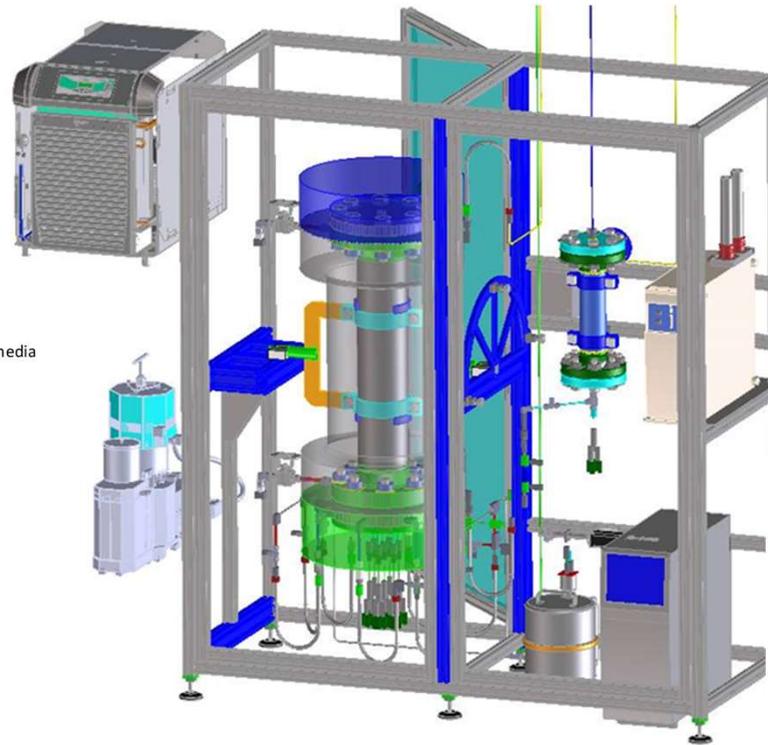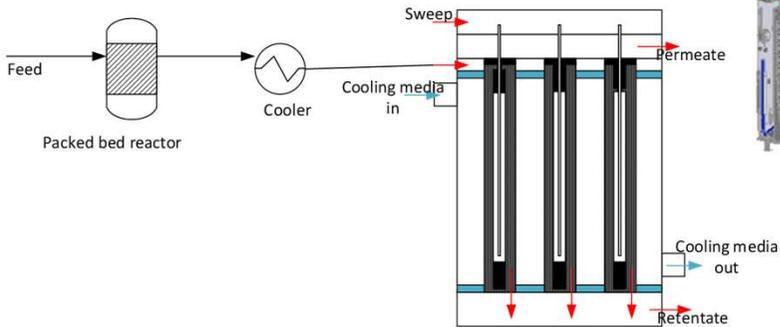


CONVERGE

CarbON Valorisation in Energy-efficient Green fuels



Testing rig upgrade at NIC


- Testing of the prominent membranes supplied by TNO.
- Advantages of NIC system:
 - high pressure op. (80 bar) and
 - high temperature op. (350°C).

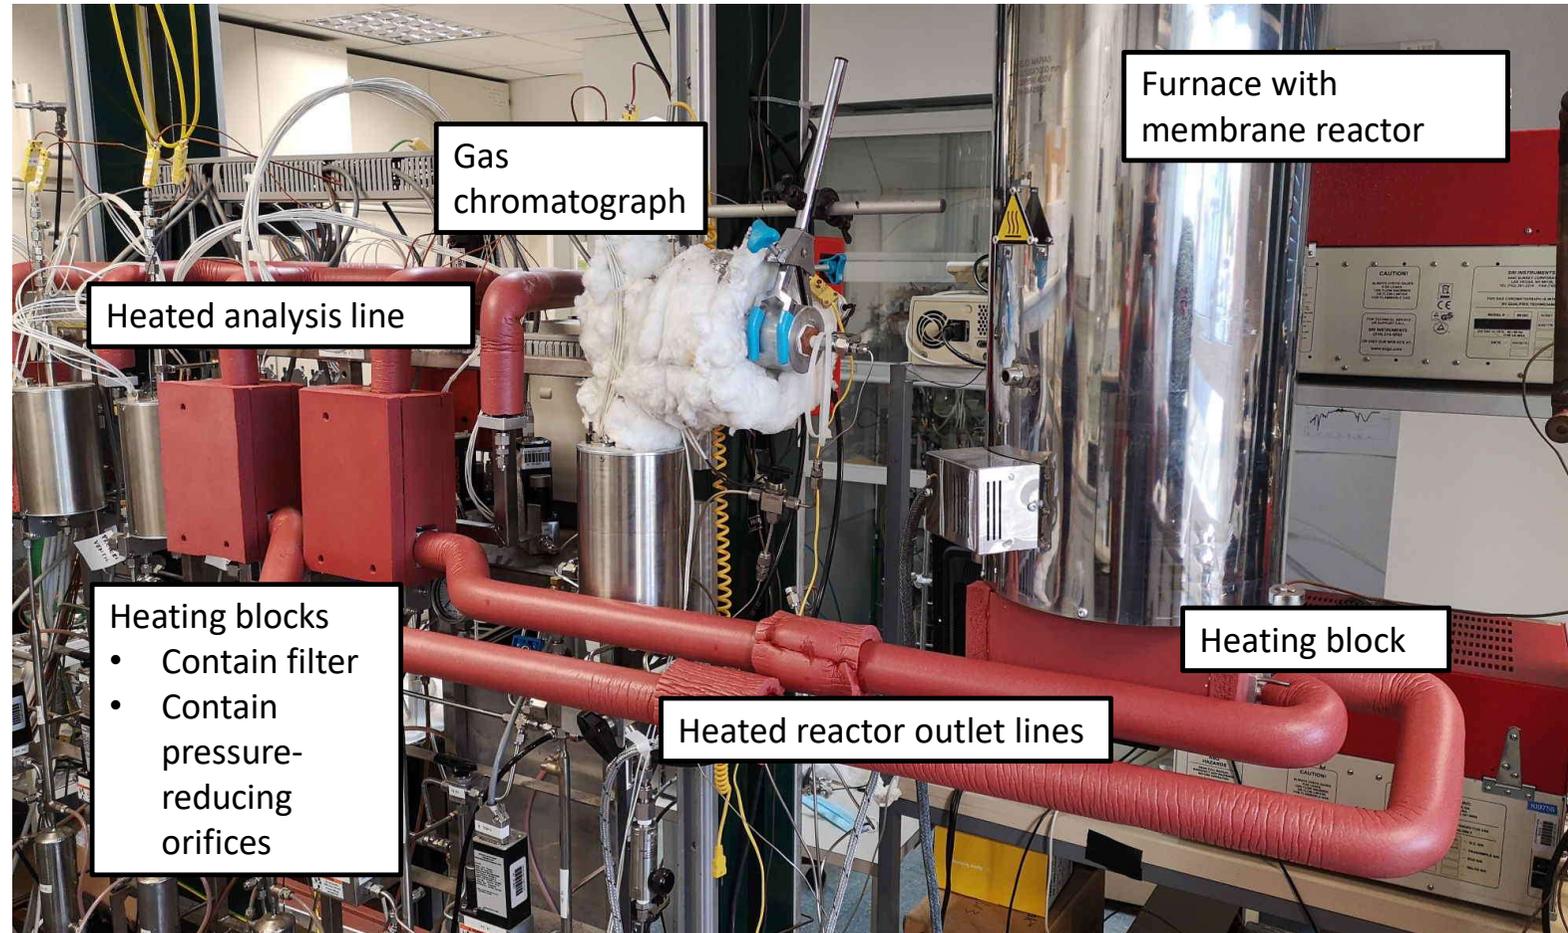




Inside the furnace with the membrane module

- Feed gas saturation with H₂O or MeOH to:
 - determine permeation and
 - simulate thermodynamical equilibrium gas mixture.
- He dilution to determine in-situ flow rates of permeate and retentate by gas chromatography.
- CO₂ is pumped into the feed gas using HPLC pump before membrane module.

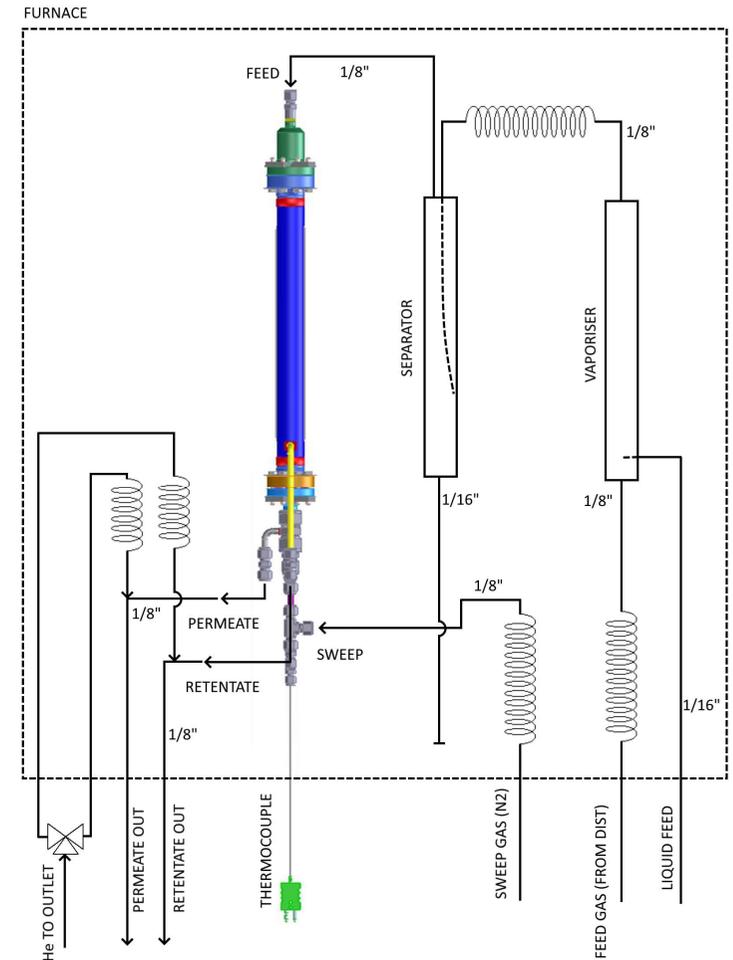




Modelling procedure

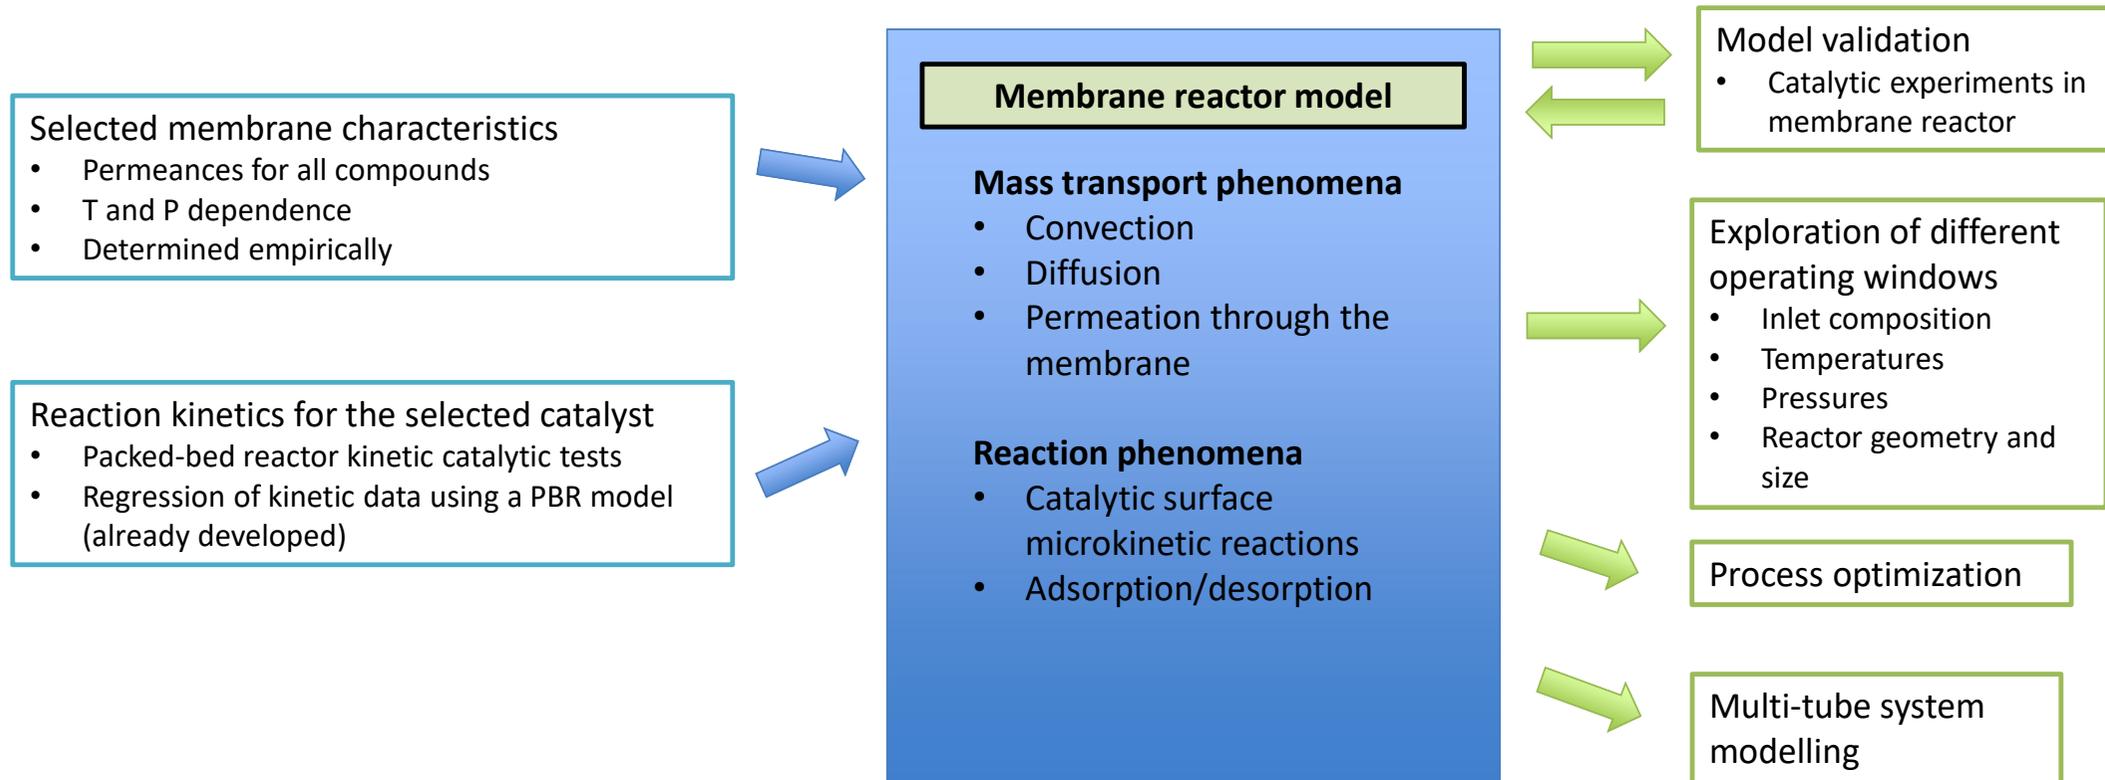



Model development

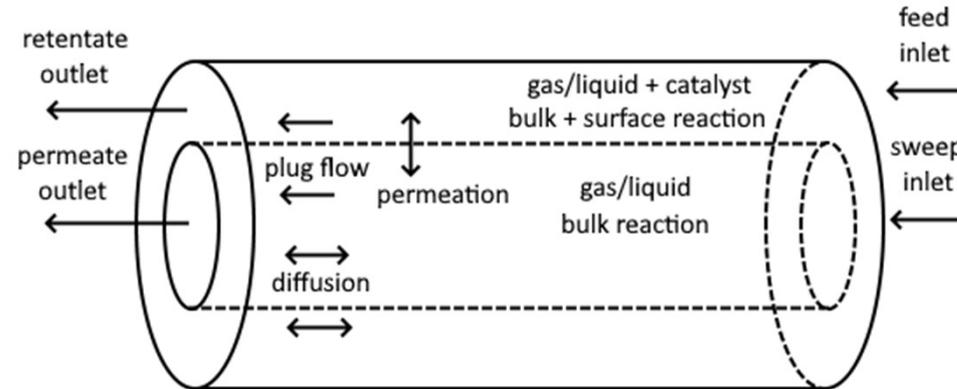

Retentate MB:
$$\frac{\partial C_i}{\partial t} = -v_{x,ret} \frac{\partial C_i}{\partial x} + \frac{D_i}{\tau} \frac{\partial^2 C_i}{\partial x^2} + C^* \frac{1 - \varepsilon}{\varepsilon} R_{i,cat} + R_{i,bulk} - \frac{\dot{N}_{memb.}}{V_{ret} \varepsilon}$$


Permeate MB:
$$\frac{\partial C_i}{\partial t} = -v_{x,perm} \frac{\partial C_i}{\partial x} + D_i \frac{\partial^2 C_i}{\partial x^2} + R_{i,bulk} + \frac{\dot{N}_{memb.}}{V_{perm}}$$

Flow through the membrane:

$$\begin{aligned} \dot{N}_{memb.} &= A_{memb.} P_i (p_{i,ret} - p_{i,perm}) \\ &= A_{memb.} P_i RT (c_{i,ret} - c_{i,perm}) \end{aligned}$$



Model development: Kinetics of MeOH synthesis

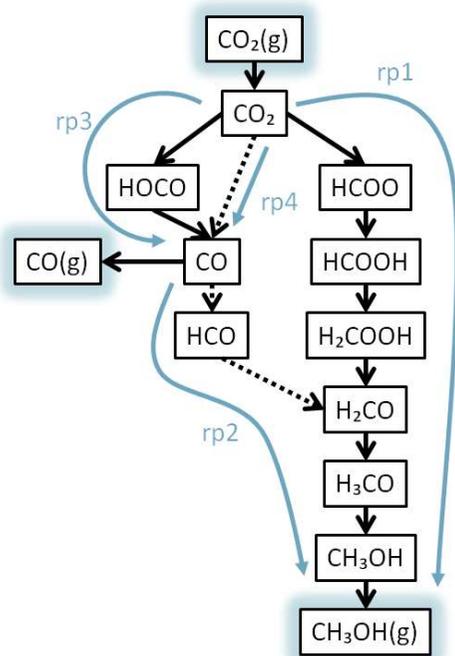

Overall reaction scheme. Black arrows represent the elementary reaction steps and blue arrows the reaction pathways. Reaction species in black squares without "(g)" are adsorbed on the catalyst's surface.

- Surface reaction mechanism for methanol synthesis on CuZnAl
- Active sites: Cu (&), Zn (*)
- 5 gas phase species, 11 surface species
- 16 reversible surface reactions, 5 of which are adsorption/desorption reactions
- The constants obtained from literature were fitted to experimental data


Reaction	optimized				original Zn/Cu(211)			
	Afor [s-1]	Eafor [kJ/mol]	Aback [s-1]	Eaback [kJ/mol]	Afor [s-1]	Eafor [kJ/mol]	Aback [s-1]	Eaback [kJ/mol]
$H_2 + \& + \& \rightleftharpoons H\& + H\&$	1.00E+03	51.00	1.77E+12	78.00	1.00E+03	51.00	1.77E+12	78.00
$H\& + CO_2^* \rightleftharpoons HOCO^*\&$	4.62E+13	83.80	8.23E+13	104.28	3.91E+12	95.53	1.00E+11	123.51
$H\& + H_2CO^*\& \rightleftharpoons H_3CO^*\& + \&$	3.12E+08	8.47	1.17E+11	88.29	4.66E+12	11.58	1.00E+11	114.82
$H\& + H_3CO^*\& \rightleftharpoons CH_3OH^*\& + \&$	3.28E+12	112.01	6.98E+12	87.02	1.99E+14	143.77	1.44E+13	116.75
$H\& + CO_2^* \rightleftharpoons HCOO^*\&$	1.69E+11	58.96	5.97E+14	142.86	3.57E+12	74.30	1.00E+11	188.16
$H\& + HCOO^*\& \rightleftharpoons HCOOH^*\& + \&$	4.69E+09	60.20	2.71E+10	75.73	7.93E+12	114.82	1.77E+11	48.25
$H\& + HCOOH^*\& \rightleftharpoons H_2COOH^*\& + \&$	1.13E+12	87.74	6.71E+13	75.98	1.26E+12	58.86	9.57E+13	58.86
$H_2COOH^*\& + * \rightleftharpoons H_2CO^*\& + OH^*$	1.82E+13	59.21	4.26E+11	17.08	2.53E+13	50.17	1.86E+11	16.40
$H\& + OH^* \rightleftharpoons H_2O^* + \&$	6.43E+09	72.66	2.89E+10	72.73	1.22E+13	77.19	4.83E+11	70.44
$CO_2^* + \& \rightleftharpoons CO\& + O^*$	3.98E+12	46.16	1.57E+12	52.88	1.04E+13	76.23	8.40E+12	65.61
$H\& + O^* \rightleftharpoons OH^* + \&$	5.90E+12	309.13	5.05E+10	226.11	1.88E+13	116.75	1.00E+11	198.77
$HOCO^*\& \rightleftharpoons CO\& + OH^*$	3.16E+10	27.99	4.89E+11	65.23	6.60E+13	22.19	1.00E+11	58.86
$CO_2 + * \rightleftharpoons CO_2^*$	7.53E+02	-2.29	2.9E+09	-29.13	7.41E+02	-2.01	1.00E+13	-30.88
$CH_3OH + * + \& \rightleftharpoons CH_3OH^*\&$	2.59E+01	-0.99	1.34E+13	43.01	8.68E+02	-2.01	1.00E+13	39.56
$H_2O + * \rightleftharpoons H_2O^*$	8.38E+02	-1.69	1.31E+12	39.45	1.16E+03	-2.01	1.00E+13	37.63
$CO + \& \rightleftharpoons CO\&$	2.86E+02	-0.98	3.25E+13	59.12	9.28E+02	-2.01	1.00E+13	98.42

Reactions and reaction rate constants (original from literature and fitted to experimental data)




Model development

- Modeling in the programme CERRES developed at NIC

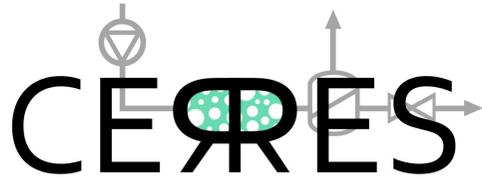

- ✓ Simulation of 14 different types of chemical reactors (including membrane reactor)
- ✓ Complex user-defined chemical kinetics
- ✓ Model-experiment compare
- ✓ Parameter optimization
- ✓ Sensitivity analysis
- ✓ Efficient computation
- ✓ Plot results and export data
- ✓ Easy to use (graphical user interface)
- ✓ Free for academic/teaching use

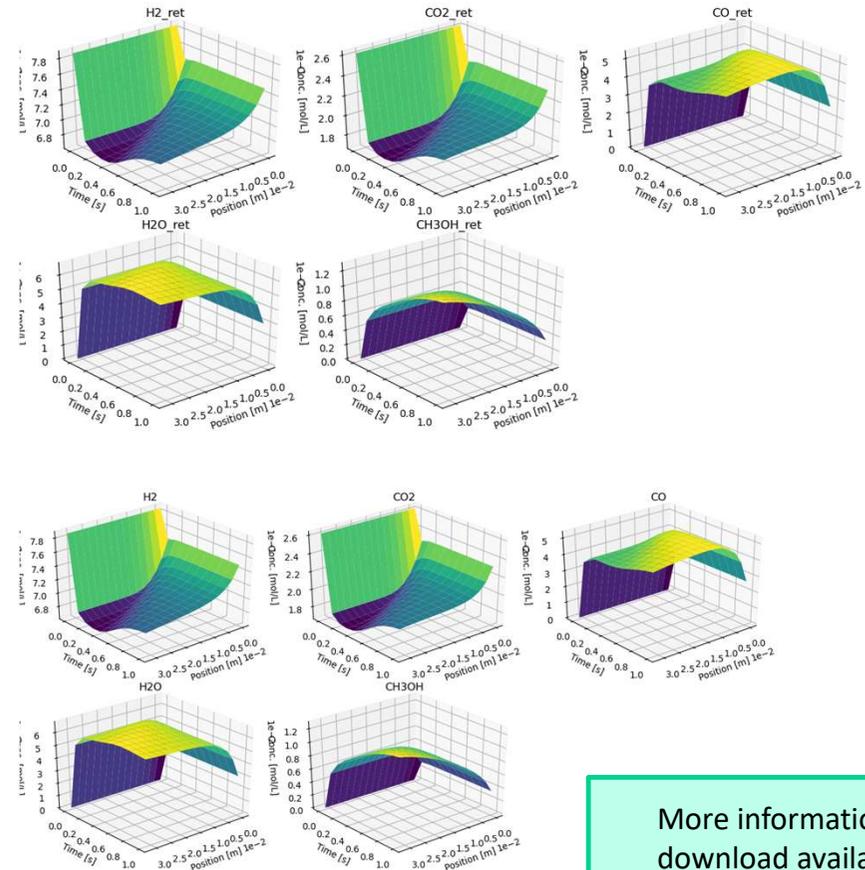

More information and download available at:

www.cerres.org



CarbON Valorisation in Energy-efficient Green fuels

CONVERGE Acknowledgements

CarbON Valorisation in Energy-efficient Green fuels

The CONVERGE project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement N° 818135



CONVERGE: CarbON Valorisation in Energy-efficient Green fuels

WP4: Green methanol synthesis for biodiesel production